




Simple | Secure | Trusted

AP-BGS1908MP-XF1

9-port 10G uplink 2.5G Web Management PoE switch

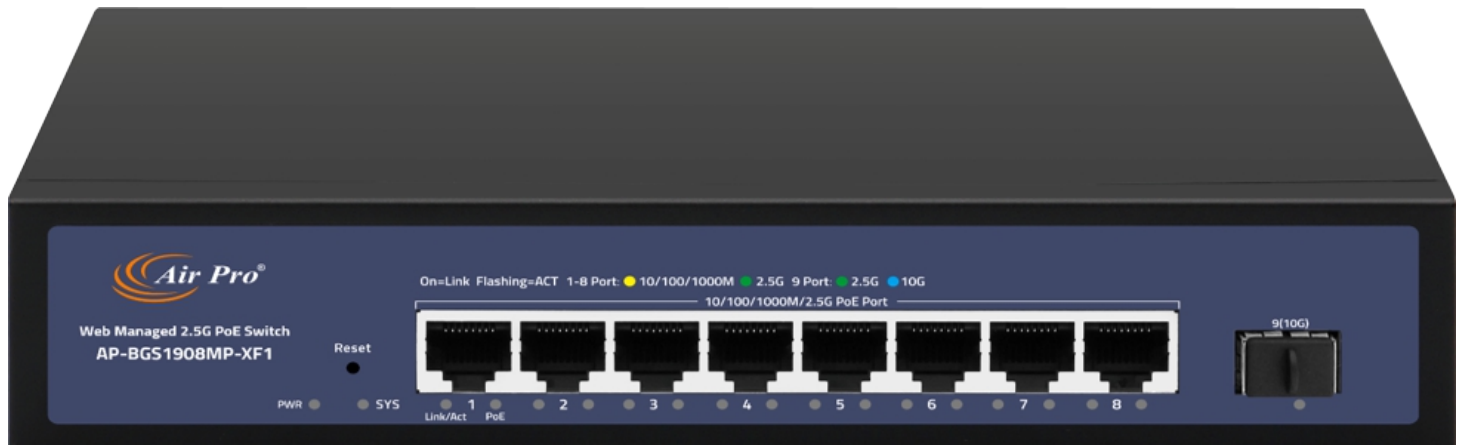

FEATURES

- 8 *100/1000/2500Mbps PoE ports+1 *10G SFP+ port.
- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3ae, IEEE 802.3x standards.
- PoE port supports 100/1000/2500Mbps adaptive.
- Supports PoE priority,default enabled in order from 1 to 8 ports.
- Supports automatic port flipping (Auto MDI/MDIX).
- The panel indicator lights will monitor the working status and assist in fault analysis.
- Flow control method, IEEE802.3x standard for full duplex and Backpressure standard for half duplex.

PRODUCT SPECIFICATIONS

Hardware Features & Performance



Item	AP-BGS1908MP-XF1	
General	Interface	8 * 2.5G PoE port 1 * 10G SFP+ port
	Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3ab (Gigabit Ethernet) IEEE 802.3bz (5G Ethernet) IEEE 802.3z (Gigabit Ethernet), IEEE 802.3ae (10 Gigabit Ethernet) IEEE802.3x (Flow Control)
Performance	Switching Capacity	60Gbps
	Packet Forwarding Rate	44.64Mpps
	Packet Buffer	8Mbit
	MAC Address Table	VLAN range 1-4094, maximum active VLAN is 31
	VLAN	4K
	Jumbo Frame	support
PoE	Transmission Method	Store and Forward
	PoE Standard	IEEE802.3af (15.4W) IEEE802.3at (30W)
	PoE Port Output Voltage	DC 44-57V
	PoE Ports	Port 1-8 PoE power output <30W
Environment	PoE Power Budget	140W
	Surge Protection	Surge Protection: Common mode 4KV, differential mode 2KV (Class B); Electrostatic ESD: Air 8KV, Contact 6KV (Class C)
	Operating Temperature	0~40°C
	Storage Temperature	-40 °C to 70 °C
Physical	Operation Humidity	10%~90%, non condensing
	Storage Humidity	5%~95%, non condensing
	Power Supply	AC 100-240V 50/60Hz DC 52V 2.88A
	Mainboard Power Consumption	10W
	Structure Information	Product Dimensions : 220 * 161 * 44mm Packaging Dimensions : 315 * 215 * 85mm Product Net Weight: Product Gross Weight:
	Packing Information	Carton Dimensions : 445 * 445 * 335mm Packing Quantity: 10PCS Packing Weight:
	Packing List	switch 1pcs, power cord 1pcs, instruction manual 1pcs, certificate of qualification 1pcs
Buttons & Indicator Lights	Fan Quantity	0
	Installation	desktop
	PWR	On: Powered on Off: Powered off
	SYS	On: Powered on Off: Powered off
	1-8 Green Light	On: Link norma Off: Link block Flashing: Data transmitting
	9 port Green Light ,Blue Light Blue Light	on: 10G link Green Light on: 1000/2500Mbps link Off: Link blocked Flashing: Data transmitting
Buttons & Indicator Lights	1-8 Yellow Light (PoE)	On: PoE power on Off: PoE powered off
	RESET	Long press for 6 seconds to restore factory settings/None

PRODUCT SPECIFICATIONS

Software Features

Item	AP-BGS1908MP-XF1
L2 Function	
Port	Port Switch configuration, Port Speed configuration Port Duplex configuration Port Flow Control configuration Jumbo Frame EEE
Link Aggregation	Static Group Maximum of 4 aggregation groups Up to 8 members per aggregation group
Storm Control	Boardcast suppression Unknown Multicast Unknown Unicast
Port Mirroring	support
Port Security	MAC Address Constraints
Port Isolation	support
Port Rate-limit	support
Loopback Detection	support
VLAN	Access/Trunk/Hybrid VLAN range 1-4094, maximum active VLAN is 31 Port VLAN
MAC Address	Dynamic MAC address Static MAC address, MAC address lookup
Spanning Tree Protocol	STP/RSTP Edge Port
Multicast	IGMP Snooping IGMP V1/V2 Router Port Static IGMP group address
QoS	Traffic classification, supporting SP and WRR scheduling Port Priority Supports up to 8 queues per port
PoE	
PoE Configuration	PoE used power PoE Type/Level/Power/Voltage/Current query PoE Switch Configuration PoE power AF/AT adaptation
Services	
Access Protocol	HTTP
Diagnostics	
Port Statistics	support
Equipment Management	support
Manager Acces	HTTP SNMP
Manager IP	Static Address DHCP Client
User Management	support
Firmware Management	Firmware upgrade
Configuration Management	Upload/Backup Configuration
Save	support
Restart	support
Factory Defaults	support
Standard Compliance	
	IEEE 802.3x flow control and back pressure
	IEEE 802.1D Spanning Tree Protocol
	IEEE 802.1w Rapid Spanning Tree Protocol
	IEEE 802.1p Class of Service
	IEEE 802.1Q VLAN tagging
	IEEE 802.3af Power over Ethernet
	IEEE 802.3at Power over Ethernet Plus
	RFC 768 UDP
	RFC 791 IP
	RFC 792 ICMP
	RFC 2068 HTTP
	RFC 1112 IGMP v1
	RFC 2236 IGMP v2

PRODUCT STRUCTURE DIAGRAM

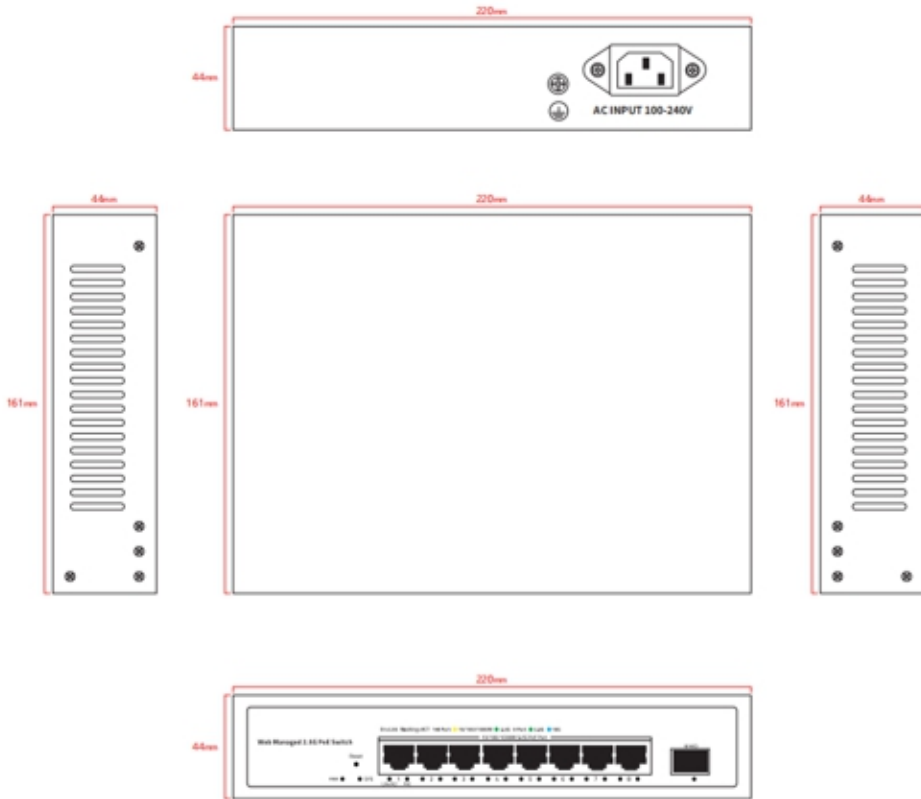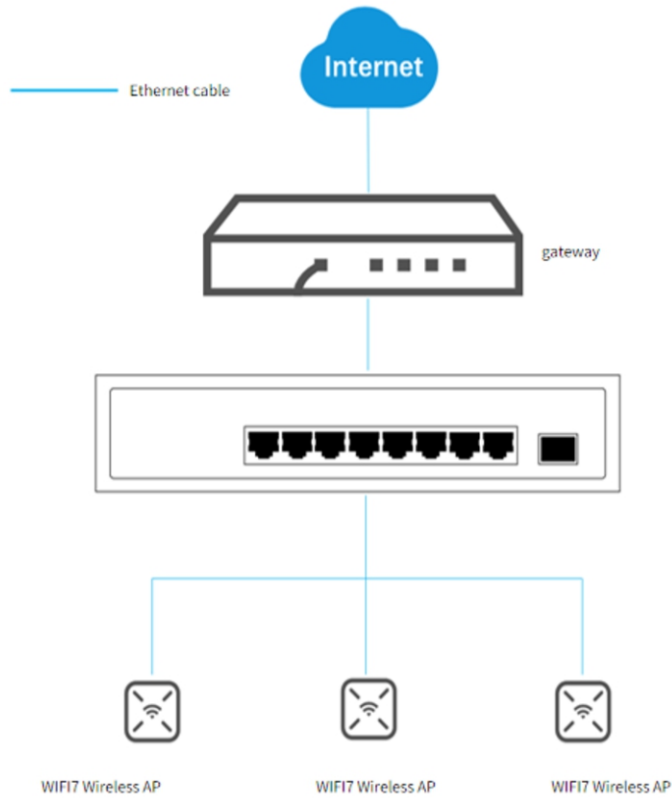

www.airpronetworks.com