

SG4500 Series 10G uplink L2+ Switch

PRODUCT OVERVIEW

AP-SG4500 is L2 10G uplink intelligent switch designed for carrier and MAN networks. It supports comprehensive QoS, enhanced VLAN functions (Dynamic VLAN, Voice VLAN, QinQ, N:1VLAN Translation etc), Ethernet Ring Protection Protocol (G.8032), classified bandwidth control, intelligent security control, OAM (Operations, Administration and Maintenance), manageability functions and Triple-Play services which fulfill the network requirements demanded by carrier network, MAN access. SG4500 Series switch offers green features like Fan-less design feature, which can dramatically lower power consumption, achieve green energy and save the cost for the carrier and MAN users.



SG4500 is equipped with the full GE ports and 4 SFP+ uplink ports. It integrates advanced management and security functions to provide performance and scalability.

KEY FEATURES AND HIGHLIGHTS

10G Uplink Access Switch

Equipped with the full GE ports and 4 SFP+ uplink ports, AP-SG4500-28GT-P-4XFP provides a solid foundation and more than enough bandwidth for your business applications today and in the future.

L3 Forwarding

AP-SG4500-28GT-P-4XFP supports L3 forwarding allowing you to segment your network into workgroups and communicate across VLANs without degrading application performance.

VSF (Virtual Switch Framework)

Virtual Switch Framework can virtualize multiple AirPro switches into one logical device, achieving the sharing of information and data tables between different switches. The performance and ports density of the virtualized device is greatly enlarged by times under VSF. VSF also simplifies management work for the network administrator and provides more reliability.

Enhanced Security

IEEE 802.1X port-based access control ensures all users are authorized before being granted access to the network. User authentication is carried out using any standard-based RADIUS server. Access Control Lists (ACLs) can be used to restrict access to sensitive network resources by denying packets and forward by different policies. User-defined ACL provides more flexible access control for users. AP-SG4500-28GT-P-4XFP supports DHCP Snooping, which prevents DHCP attacks and illegal DHCP SERVER by setting trust ports and untrust ports. With **DHCP Snooping** binding and option82

enabled, it can combine modules like dot1x and ARP, or implement user-access-control independently. AP-SG4500-28GT-P-4XFP supports abundant L2 security features such as **ARP guard**, **Anti-ARP scanning**, and other ARP and **MAC Security** technology to protect network security and reliability.

High Reliability

AP-SG4500-28GT-P-4XFP supports 410G uplink ports, which could be designed to offer redundant uplinks with various ring protection applications, effectively raised the expansibility and performance of the network. G.8032 provides sub-50ms protection and recovery switching for Ethernet traffic in a carrier ring topology. AP-SG4500-28GT-P-4XFP supports **G.8032** v2 and can be deployed in a variety of complex network topologies including single ring, tangent ring, intersecting rings, double rings, and other home networking.

Abundant Multicast Features

AP-SG4500-28GT-P-4XFP also supports **MVR** (Multicast VLAN Register), selectively allows traffic to cross between different VLANs for bandwidth and security reasons. With the MVR Trunk function, which could associate multicast VLAN to trunk port, AP-SG4500-28GT-P-4XFP combines the VLAN data into the same link, saving lots of resources for users. AP-SG4500-28GT-P-4XFP could prevent multicast traffic from flooding via IGMP Snooping, while multicast traffic is only forwarded to ports associated with multicast devices.

PRODUCT SPECIFICATIONS

Hardware Specifications

Item	AP-SG4500-24GT-4XFP	AP-SG4500-28GT-P-4XFP	AP-SG4500-52GT-4XFP
Ports	24 x 10/100/1000Base-T + 4 x 1/10GE(SFP+) Auto-MIDX	24 x 10/100/1000Base-T + 4 x 1/10GE(SFP+) Auto-MIDX	48 x 10/100/1000Base-T + 4 x 1/10GE(SFP+) Auto-MIDX
Management port	1x Console port 1x USB2.0 interface 1x Reset key	1x Console port 1x USB2.0 interface 1x Reset key	1x Console port 1x USB2.0 interface 1x Reset key
Performance			
Switching Capacity	128Gbps	128Gbps	176Gbps
Forwarding Rate	95Mbps	95Mbps	131Mbps
MAC ADDRESS	16K	16K	16K
Jumbo Frame	10K bytes	10K bytes	10K bytes
Packet Buffer	12Mbits	12Mbits	24Mbits
ACL Table	512	512	512
Queues per port	8	8	8
VLAN TABLE	4K	4K	4K
Physical			
Dimension(WxHxD)	440mm x 44mm x 170mm	440mm x 44mm x 300mm	440mm x44mm x280mm
Power Input	100~240VAC, 50~60Hz	100~240VAC, 50~60Hz	100~240VAC, 50~60Hz
Power Consumption	21W	<420W	<50W
Cooling	Passive	Active	Active
Temperature	Working 0°C~50°C, Storage -40°C~70°C	Working 0°C~50°C, Storage -40°C~70°C	Working 0°C~50°C, Storage -40°C~70°C
Relative Humidity	5%~95%, non-condensing	5%~95%, non-condensing	5%~95%, non-condensing
EMC Safety	CE, RoHS	CE, RoHS	CE, RoHS
PoE	NA	IEEE 802.3af POE (15.4W) IEEE 802.3at POE+ (30W) PoE output 370w	NA
Main Features			
Forwarding	Storage and Forwarding		
VLAN	Port-based VLAN, IEEE802.1Q, private VLAN, Protocol VLAN, Voice VLAN, MAC VLAN Normal QinQ, Flexible QinQ VLAN Translation, N:1 VLAN Translation		
L3 Features	Static Routing, PBR		
DHCP	IPv4/IPv6 DHCP Client, IPv4/IPv6 DHCP Relay Option 82, Option 37/38 IPv4/IPv6 DHCP Snooping, IPv4/IPv6 DHCP Server		
Reliability	Spanning Tree	802.1D STP, 802.1W RSTP, 802.1S MSTP Root Guard, BPDU Guard, BPDU Forwarding, TCN filtering	
	LACP	64 groups / 8 ports	
Reliability	L2 Ring Protection	MRPP ERPS (G.8032) Loopback Detection Fast Link	
	Security	IP ACL, MAC ACL, MAC-IP ACL, User-Defined ACL Time Range ACL ACL rules can be configured to port, VLAN Storm Control based on packets Port Security, MAC Limit based on VLAN and Port Anti-ARP-Spoofing, Anti-ARP-Scan, ARP Binding ND Snooping DAI IEEE 802.1x Authentication, Authorization, Accounting Radius, TACACS+	
Multicast	IGMP v1/v2/v3 snooping, IGMP Proxy, IGMP v3 MLD v1/v2 snooping		

PRODUCT SPECIFICATIONS

Hardware Specifications

Item	AP-SG4500-28GT-P-4XFP
QoS	<ul style="list-style-type: none"> 8 Queues Per Port Bandwidth Control Flow Redirect Classification based on ACL, VLAN ID, COS, TOS, DSCP, Policing Based on Port and VLAN Single Rate single barrel double color for Policing SP DWRR SDWRR²SP+DWRR for Scheduling Match the IP fragmentation of a message
Maintenance and Operation Management	<ul style="list-style-type: none"> TFTP/FTP CLI, Telnet, Console Free Cloud Managed Web/SSL (IPv4/IPv6) SSH (IPv4/IPv6) SNMPv1/v2c/v3 SNMP Trap Public & Private MIB interface RMON 1,2,3,9 Ping, Trace Route Radius Authentication Syslog (IPv4/IPv6) SNTP/NTP (IPv4/IPv6) Dual IMG, Multiple Configuration Files Port Mirror, RSPAN sFlow OAM EFM VCT, DDM ULDP (like Cisco UDLD) LLDP/LLDP MED
Green Energy	<ul style="list-style-type: none"> Fanless Auto-speed fan

ORDER INFORMATION


Product	Description
AP-SG4500-24GT-4XFP	L2+ Full Gigabit Access Switch with 24 10/100/1000Base-T and 4 10GE(SFP+) ports, static routing, 1 fixed AC power
AP-SG4500-28GT-P-4XFP	L2+ Full Gigabit Access Switch with 24 10/100/1000Base-T PoE and 4 10GE(SFP+) ports, static routing, 1 fixed AC power, PoE output up to 370w
AP-SG4500-52FT-4XFP	L2+ Full Gigabit Access Switch with 48 10/100/1000Base-T and 4 10GE (SFP+) ports, static routing, 1 fixed AC power

END TO END SOLUTIONS

AirPro provides a complete end-to-end enterprise networking solutions covering core, aggregation, access, and wireless layers. With a comprehensive portfolio including data center switches, access and industrial switches, routers, wireless controllers, and Wi-Fi solutions, AirPro enables seamless wired and wireless integration. These layered architecture ensures high availability, scalability, and centralized management, making it ideal for campus, enterprise, and multi-site deployments.

Key highlights include:

- Complete portfolio covering core, aggregation, access, and wireless layers.
- Seamless integration of wired and wireless networks.
- Centralized management for simplified operation and deployment.
- Scalable architecture suitable for enterprise and campus networks.

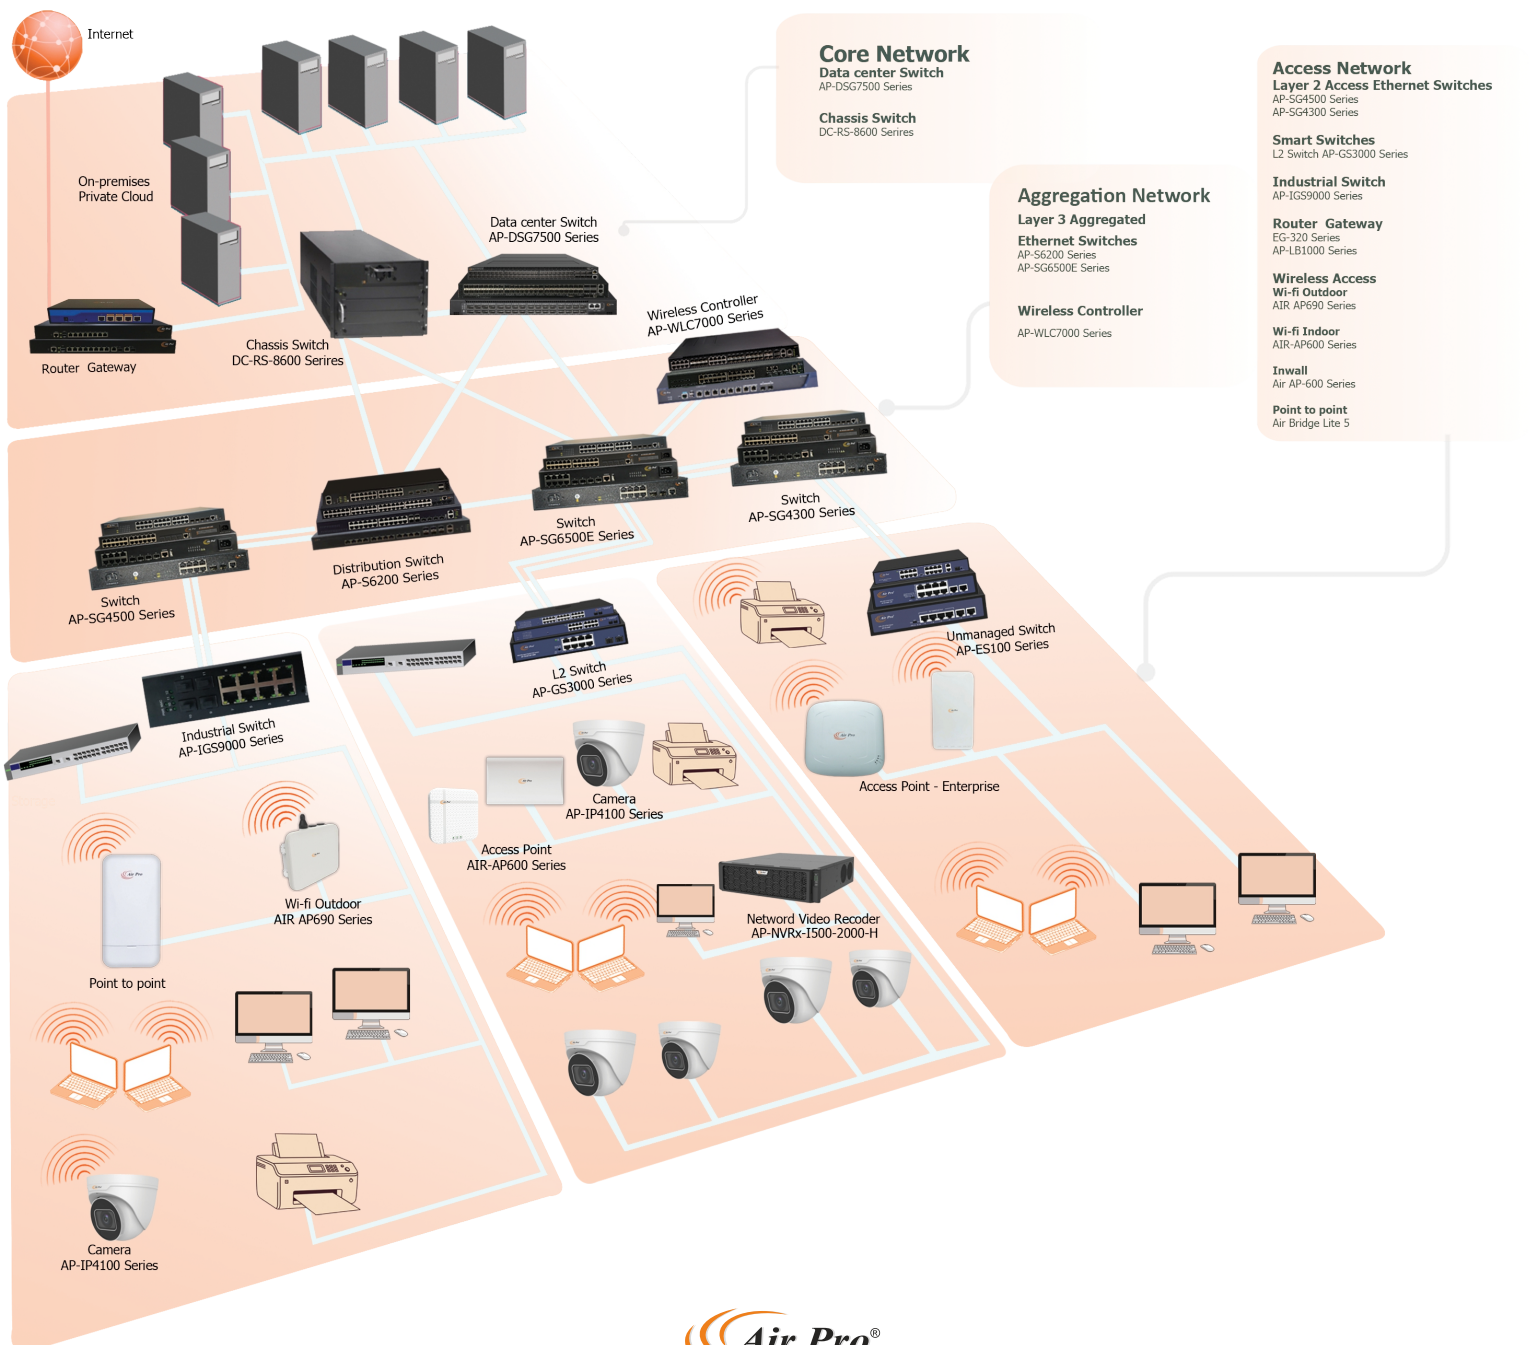

www.airpronetworks.com