

In-wall 802.11ax Wi-Fi 6 Dual Band Enterprise AP Datasheet

PRODUCT OVERVIEW

AIR-WAP605-AX is a dual-band high-performance gigabit wireless access point based on the 802.11ax standard. supports standard 86 panel for easy installation and offers upto 1775Mbps access rate. It works in 2.4GHz and 5GHz frequency bands and supports advanced wireless technologies such as MU-MIMO, OFDMA, spatial multiplexing and TWT. The first radio works in the 2.4GHz frequency band and can provide access rate of upto 575Mbps; the second radio works in the 5GHz frequency band and can provide access rate of upto 1200Mbps.



802.11 a/b/g/n/ac/ax



1775Mbps, 2*2 MIMO



128 concurrent users




Standard PoE Input



Standard Size



Cloud Management



Downlink Port

KEY FEATURES AND HIGHLIGHTS

802.11ax Wi-Fi 6 wireless access point:-

AIR-WAP605-AX supports the 802.11ax standard, operates in both 2.4 GHz and 5 GHz band, and provides an access rate upto 1775 Mbps. This model is a high-end in-wall access point for hotel, education, government and business networks.

Wired and wireless gigabit access:-

AIR-WAP605-AX has an integrated gigabit wired uplink port which can truly meet the wireless bandwidth requirement of clients. It also has four-gigabit downlink Ethernet ports which support flexible VLAN configuration so that the wired and wireless traffic can be logically separated.

Good PoE compatibility:-

AIR-WAP605-AX can work well with all PoE switches (viz. Cisco, HUAWEI, Juniper, etc.) which support 802.3af/at standard. This allows AIR-WAP605-AX to power up directly without any power adapter.

Multiple Gigabit downlink ports:-

AIR-WAP605-AX can provide 4 Gigabit downlink ports that allow the customer to connect the terminals which do not support Wi-Fi, and provides more stable connections.

Easy to deploy x86 standard panel:-

AIR-WAP605-AX panel supports 86 box standard, and can perfectly be installed on any standard panel. With the use of the PoE cable, the whole installation is low cost, silent and quick (the time to install an AP is less than 3 minutes).

Multi-mode: fit, fat, bridge:-

AIR-WAP605-AX can work in fit, fat or bridge mode and can flexibly switch between these three modes according to network planning requirements.

PRODUCT SPECIFICATIONS

Hardware Specifications

Item	AIR-WAP605-AX	
Dimensions (L*W*D) (mm)	160x86x38	
Uplink port	1*1000M Ethernet uplink port, 1* 10/100/1000M pass-through ports	
Downlink ports	4* 10/100/1000M ports, 1* 10/100/1000M pass-through ports	
The anti-theft screw	supports an anti-theft screw	
Power supply	802.3af & at and External power adapter (Input: 100~240V AC , Output: 48 V DC)	
Maximum power consumption	<12W	
RF port	Built-in 2.4 GHz 3 dBi antenna and 5 GHz 3 dBi antenna	
Working frequency band	802.11b/g/n/ax: 2.4 GHz to 2.483 GHz 802.11a/n/ac/ac wave 2/ax: 5.150GHz to 5.350GHz 5.725GHz to 5.850GHz	
Modulation technology	11b : DSS: CCK@5.5/11Mbps, DQPSK@2Mbps, DBPSK@1Mbps 11a/g : OFDM:64QAM@48/54Mbps,16QAM@24Mbps, QPSK@12/18Mbps, BPSK@6/9Mbps 11n : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM 11ac : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM,256QAM 11ax: MIMO-OFDMA: BPSK, QPSK,16QAM,64QAM,256QAM,1024QAM	
Transmit power	2.4G: 20dBm (Per Chain) 5G : 20dBm (Per Chain) (Note: final output power comply with deployment regulation might be different)	
Power adjustment granularity	1 dBm	
Working/Storage temperature	-0°C to 40°C -40°C to +70°C	
Working/Storage RH	5% to 95% (non-condensing)	
Protection level	Ip31	
WLAN	Product positioning	In-wall dual-frequency
	Working frequency band	2.4GHz and 5GHz
	Bandwidth performance	1775Mbps
	Virtual AP (BSSID)	32
	Concurrent user	128
	Number of spatial streams	2.4GHz:2, 5GHz:2
	Dynamic channel adjustment (DCA)	Yes
	Transmit power control (TPC)	Yes
	Blind area detection and repair	Yes
	SSID hiding	Yes
	RTS/CTS	Yes
	RF environment scanning	Yes
	Hybrid access	Yes
	Restriction on the number of access users	Yes
	Link integrity check	Yes
	Intelligent control of terminals based on airtime fairness	Yes
High-density application optimization	Yes	
11n enhancements	Space streams	2.4GHz:2, 5GHz:2
	Frequency band	2.4GHz +5GHz
	80 MHz bundling	Yes
	1200M bps PHY	Yes
	Frame aggregation (A-MPDU)	Yes
	Frame aggregation (A-MSDU)	Yes
	Maximum likelihood demodulation (MLD)	Yes
	Transmit beamforming (TxBF)	Yes
	Maximum ratio combining (MRC)	Yes
	Space-time block coding (STBC)	Yes
Low-density parity-check code (LDPC)	Yes	


PRODUCT SPECIFICATIONS

Hardware Specifications

Security	Encryption	64/128 WEP, TKIP, and CCMP encryption
	802.11i	Yes
	Portal authentication	Yes
	WAPI	Yes
	MAC address authentication	Yes
	LDAP authentication	Yes
	PEAP authentication	Yes
	WIDS/WIPS	Yes
	Protection against DoS attacks	Anti-DoS for wireless management packets
	Forwarding security	Frame filtering, white list, static blacklist, and dynamic blacklist
	User isolation	AP L2 forwarding suppression Isolation between client
	Periodic SSID enabling and disabling	Yes
	Access control of free resources	Yes
	Wireless SAVI	Yes
	ACL	Access control of various data packets such as MAC, IPv4, and IPv6 packets
Secure access control of APs	Secure access control of APs, such as MAC authentication, password authentication, or digital certificate authentication between an AP and an AC	
802.11W	Yes, encryption of management frames	
Forwarding	IP address setting	Static IP address configuration or dynamic DHCP address allocation
	IPv6 forwarding	Yes
	IPv6 portal	Yes
	Local forwarding	Yes
	Multicast	IGMP snooping
	Roaming	Yes
	AP switching reference	Signal strength, bit error rate, RSSI, S/N, whether neighboring APs are normally operating, etc.
QoS	WDS	Yes
	WMM	Yes
	Priority mapping	Ethernet port 802.1P identification and marking Mapping from wireless priorities to wired priorities
	QoS policy mapping	Mapping of different SSIDs/VLANs to different QoS policies Mapping of data streams that match with different packet fields to different QoS policies
	L2-L4 packet filtering and flow classification	Yes: MAC, Ipv4, and IPv6 packets
	Load balancing	Load balancing based on the number of users Load balancing based on user traffic Load balancing based on frequency bands
	Bandwidth limit	Bandwidth limit based on Aps Bandwidth limit based on SSIDs Bandwidth limit based on terminals Bandwidth limit based on specific data streams
	Call admission control (CAC)	CAC based on the number of users
	Power saving mode	Yes
	Automatic emergency mechanism of APs	Yes
	Intelligent identification of terminals	Yes
Multicast enhancement	Multicast to unicast	
Management	Network management	Centralized management through an AC; both fit and fat modes
	Mesh networking	Through central AP to manage the RE AP
	Maintenance mode	Both local and remote maintenance
	Log function	Local logs, Syslog, and log file export
	Alarm	Yes
	Fault detection	Yes
	Statistics	Yes
	Switching between the fat and fit modes	An AP working in fit mode can switch to the fat mode through a wireless AC; An AP working in fat mode can switch to the fit or bridge mode through a local control port or Telnet(web) An AP working in bridge mode can switch to the fit or fat mode through a local control port or Telnet(web)
	Remote probe analysis	Yes
	Dual-image (dual-OS) backup mechanism	Yes
Watchdog	Yes	
Value added service	Value added marketing	Support: various apps based on intelligent terminals, advertising push based on location, personalized push of portals
	Value added authentication	WeChat, SMS, QR code
	Passenger flow analysis	Yes
	Bluetooth	Yes

TYPICAL APPLICATION

Hardware Specifications

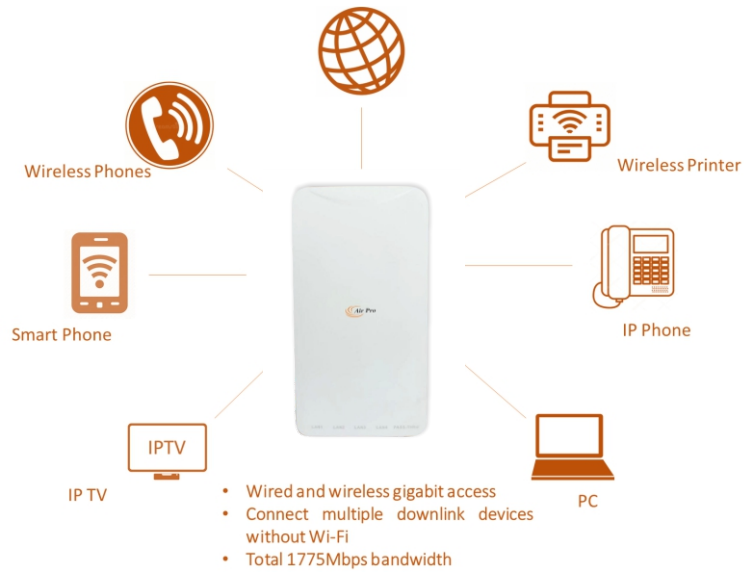

- 802.11 a/b/g/n/ac/ax
- High performance, 1775Mbps
- 802.3 af/at PoE
- X86 standard, easy installation
- Multiple gigabit downlink port

ORDER INFORMATION

Product	Description
AIR-WAP605-AX	AirPro In-wall Wi-Fi 6 AP, 802.11a/b/g/n/ac/ax supported (2.4GHz:2*2, 5GHz 2*2), upto 1775Mbps access rate, built-in antenna, 1 Gigabit uplink port, 4 Gigabit wired ports, fat/fit/bridge, 802.3 af & at, managed by AirPro hardware controller & cloud platform



www.airpro.in